

#12 ACCUDRYVE™ STITCH FASTENER

HEAD

- Head Style: 1/4"
- Wet paint application for consistent socket fit and weathering performance

WASHER

- Bonded Seal Washer
- Engineered deflection to prevent over driving
- Oversized diameter to provide positive sealing

THREAD

- Threads per inch: 14
- Aster feature on two full threads

POINT

- Double lead piercing point

FINISH

- Mechanical Zinc Plate

MATERIAL

- Carbon Steel



#12 ACCUDRYVE™ STITCH FASTENER


SIZE	ITEM#	# PER M	BOX QTY
12-14 x 3/4	13871ZBN99ADHSL	15	3,000

ENGINEERING TEST REPORT

92 in./lbs	2,800lbs.	2,000 lbs.

All test results and recommendations are based on laboratory tests. Specific job site conditions should be taken into consideration when specifying the proper fastener. Actual field values may vary, therefore we assume no liability for use of this information. Pull out values are a measurement of wood material strength

#12 ACCUDRYVE™ STITCH FASTENER

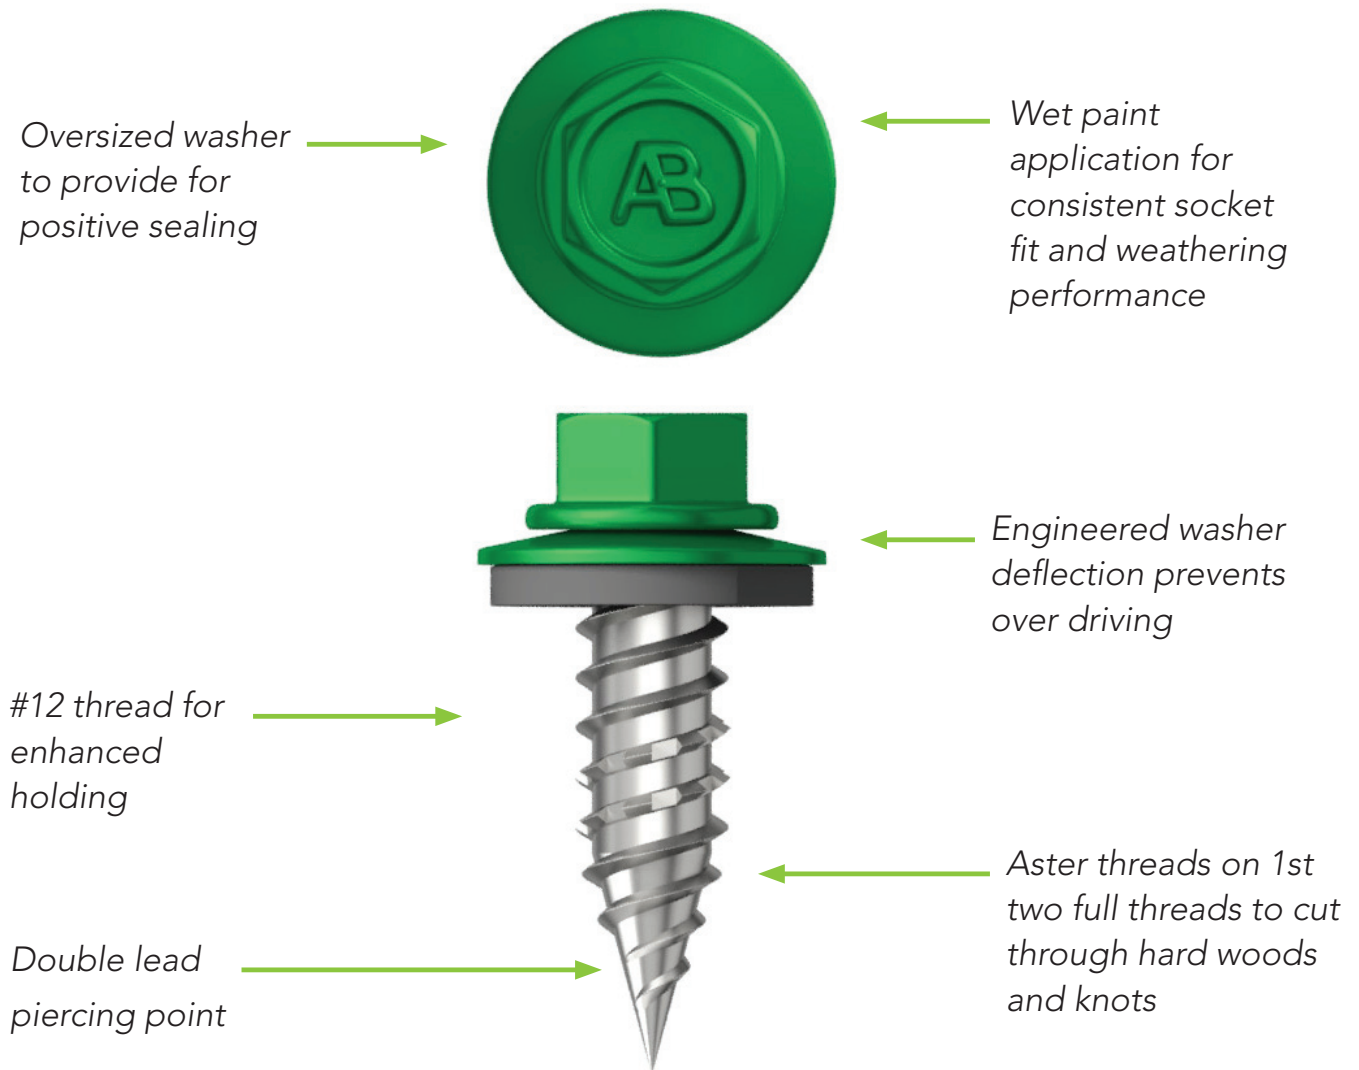

INSTALLATION INSTRUCTIONS:

- Use AccuDRYve stich screw at side laps and for installation of trim
- Only use with AccuDRYve Screw Gun
- Do not pulse or trigger gun